

# TRANBERG® IMT FLOODLIGHT

TEF 9975 LED Floodlight, Helideck Floodlight System

Explosive atmospheres: Zone 1, 2 & Safe Area & Areas with combustible dust: Zone 21 & 22



The TRANBERG® IMT Floodlight (TEF 9975) is made with an anodized, marine grade aluminium casting, making it highly resistant to seawater environments and therefore perfectly suitable for marine applications. The integral mounting bracket allows the unit to be easily fixed and the direction of

the beam in the horizontal to be adjusted. The light cover is made of clear toughened glass which is extremely shock resistant and break proof with a Fresnel (PMMA) lens. The high power LEDs in combination with the Fresnel lens produce a superior light output. A special design feature of

this product is in the heat management – the TRANBERG® IMT Floodlight (TEF 9975) has a series of cooling fins with air ducts to dissipate the heat generated from the LEDs, which means that even in conditions of direct sunlight and high temperatures, the light unit continues to be cooled.

## Application

- Helideck
- Floodlight

## Features and benefits

- Shock and Vibration Resistant
- Sealed for life
- Heat Dissipation
- Utilizing LED technology
- Suitable for use in Zone 1, Zone 2 and Safe Area
- Marine grade anodized aluminium
- According to ICAO Annex 14, CAP437 and NORSOK

## Approvals and certificates

- DNV 21 ATEX 49246X
- IECEx DNV 21.0055X



## Technical Data

Material:	Marine Grade Anodized Aluminium
Explosion Protection:	Ex eb mb IIC T3 Gb Ex tb IIIC T135°C Db IP66 Ta=-40° ...+55°C
Input voltage:	95-250V AC / 24 V DC
Light output:	2400 lm
Light intensity:	17500 cd
Power consumption:	Max 40W
Ingress protection:	IP66
Weight w/ package:	12 kg
Cable entries:	2x M25 Cable Gland (11,0-20,1mm) 1x M25 Stopping Plug 1x M25 Drain Plug
Operating temperature:	-40°... +55°C
Light Source:	LED
Light Color:	Natural white, 5000K

TRANBERG STAHL

THE STRONGEST LINK.

R. STAHL TRANBERG AS

Main office | Strandvingen 6 | N-4032 Stavanger, Norway | T +47 51 57 89 00 | E info.no-st@r-stahl.com | stahl-tranberg.com

# TRANBERG® IMT FLOODLIGHT

TEF 9975 LED Floodlight, Helideck Floodlight System


Explosive atmospheres: Zone 1, 2 & Safe Area & Areas with combustibile dust: Zone 21 & 22

Description	Low Bracket	High Bracket
TRANBERG® IMT Floodlight Ex 90-240V dim	99751000	99751001
TRANBERG® IMT Floodlight Ex 24V dim	99752000	99752001

Accessories	Part No.
IMT Floodlight Anti-Glare Hood for 9975	50523268
IMT Floodlight Mounting bracket High for 9975	50520081
Cable Gland Exe: E205/624 M25/D kit 11,0-20,1mm/15mm AISI316	6242506
Stopping Plug Exe/Exd: TEF793/650 M25/15mm AISI316	6502506
TEF 731 Drain plug/Breather M25, Stainless Steel	7312701

## Dimensions

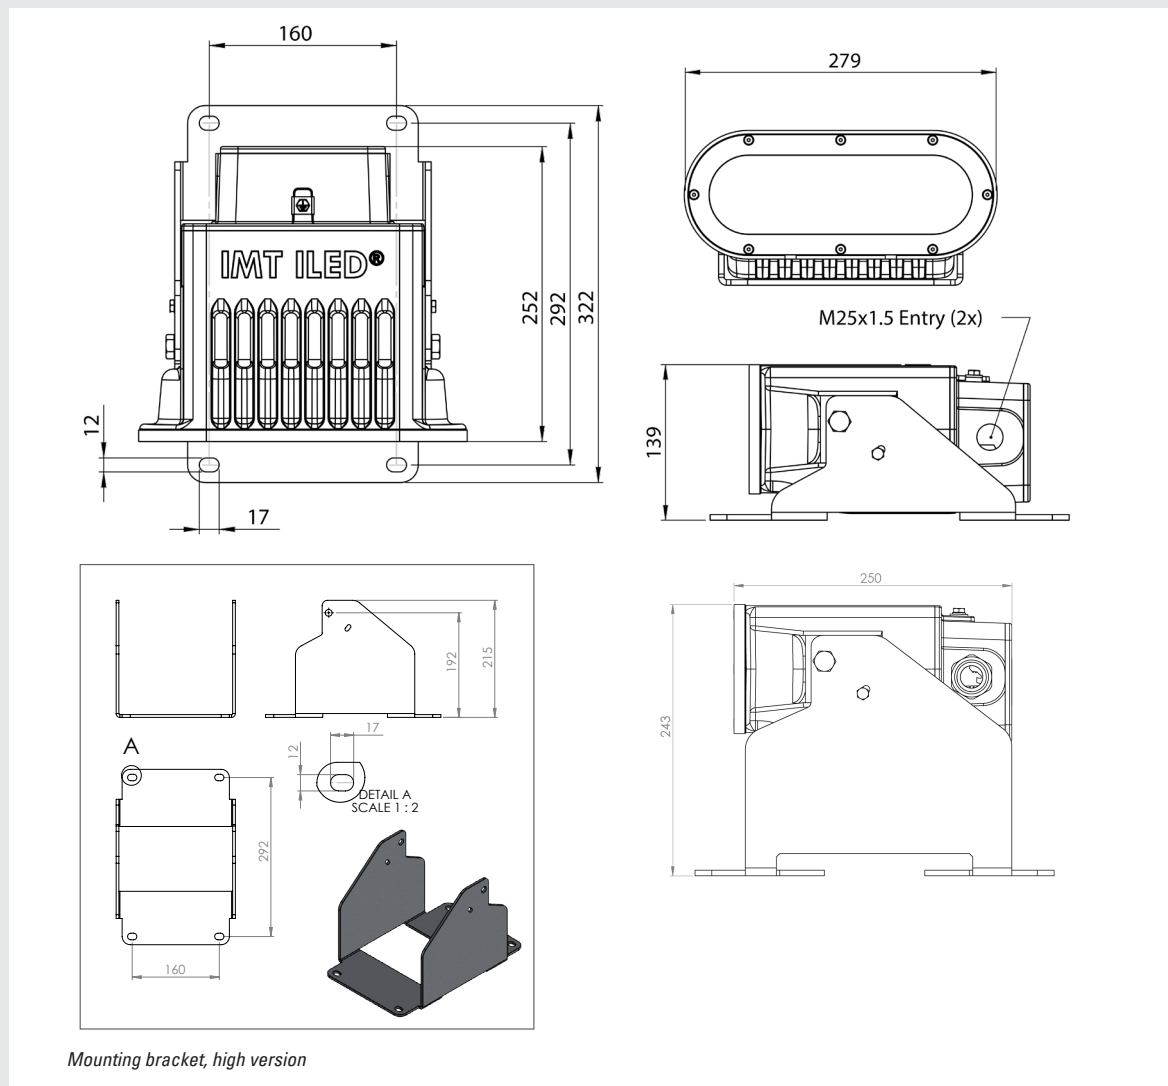

R. STAHL TRANBERG AS

Main office | Strandsvingen 6 | N-4032 Stavanger, Norway | T +47 51 57 89 00 | E info.no-st@r-stahl.com | stahl-tranberg.com

TRANBERG